

#### GENERAL CHARACTERISTICS

Nominal Overall Diameter .....	385	mm
Nominal Voice Coil Diameter .....	65	mm
Magnet Weight .....	220	g
Flux Density.....	1.14	T
Weight.....	2.90	Kg

#### THIELE-SMALL PARAMETERS


Voice Coil DC Resistance .....	$R_E$	5.68	Ω
Resonance Frequency .....	$f_s$	74.8	Hz
Mechanical Q Factor.....	$Q_{MS}$	10.30	
Electrical Q Factor.....	$Q_{ES}$	0.72	
Total Q Factor .....	$Q_{TS}$	0.67	
Mechanical Moving Mass .....	$M_{MS}$	55.6	g
Mechanical Compliance .....	$C_{MS}$	81	μm/N
Force Factor .....	$B \times l$	14.35	Wb/m
Equivalent Acoustic Volume.....	$V_{AS}$	65.6	lt.
Maximum Linear Displacement ....	$X_{MAX}$	+/-2.0	mm
Reference Efficiency .....	$\eta_0$	3.66	%
Diaphragm Area .....	$S_D$	754.7	cm <sup>2</sup>
Losses Electrical Resistance.....	$R_{ES}$	81.1	Ω
Voice Coil Inductance @ 1kHz .....	$L_E$	0.68	mH

#### CONSTRUCTIVE CHARACTERISTICS

Magnet.....	Neodymium
Voice Coil Winding.....	Aluminium
Voice Coil Former.....	Kapton
Cone .....	Paper
Surround.....	Paper - Integrated
Dust Dome .....	Non Treated Cloth
Basket .....	Pressed Sheet Steel


#### ELECTRICAL CHARACTERISTICS

Nominal Impedance.....	8	Ω
Musical Power .....	300	W
Rated Power* .....	150	W
Sensitivity @ 1 W, 1 m .....	99.3	dB

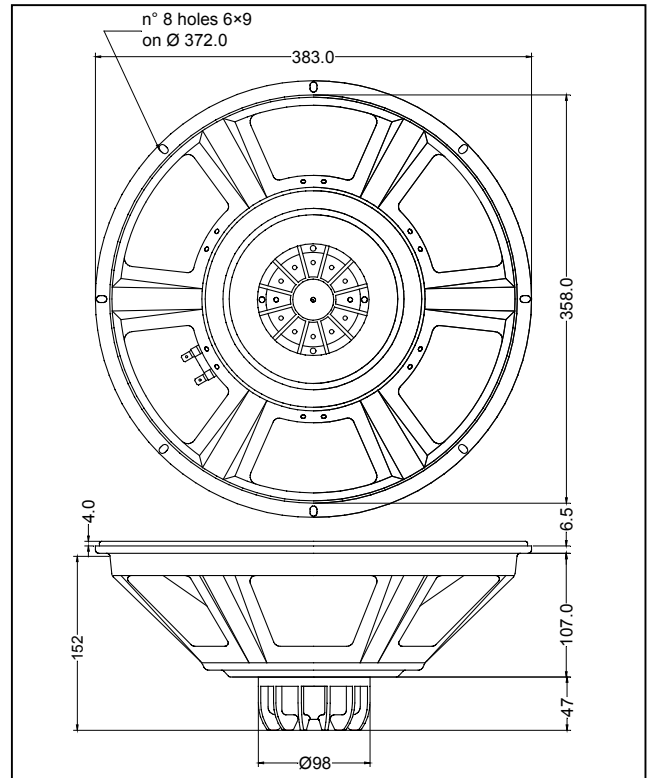

\*rated power measured with 2 hours test with pink noise signal, 6 dB crest factor, loudspeaker mounted on enclosure  
 Thiele-Small parameters measured with I ASFR system

Frequency Response on IEC Baffle (DIN 45575) @ 1 W, 1 m - Impedance

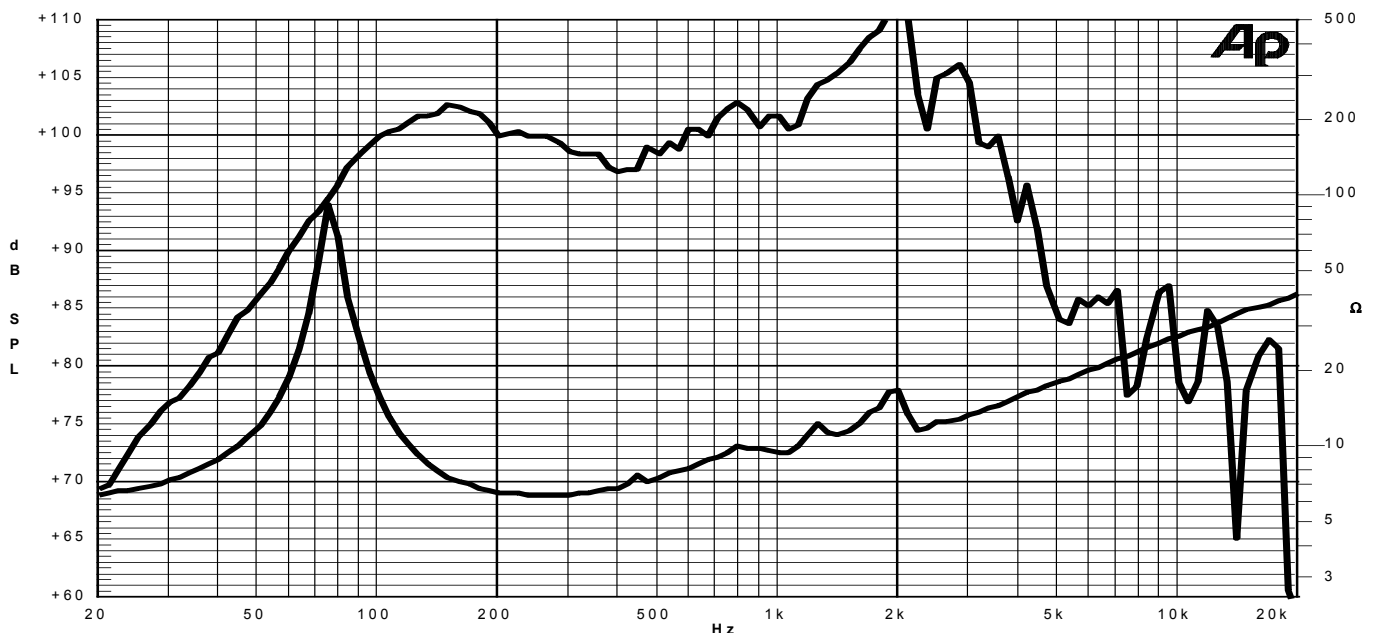

Due to continuing product improvement, the features and the design are subject to change without notice.

25/05/07